

PVI-10.0-TL-OUTD PVI-12.5-TL-OUTD

GENERAL SPECIFICATIONS OUTDOOR MODELS

The three-phase 10.0 and 12.5 kW non-isolated inverter is an industry leader.

Designed for commercial usage, this three-phase inverter is highly unique in its ability to control the performance of the PV panels, especially during periods of variable weather conditions. This transformerless device has two independent MPPTs and efficiency ratings of up to 97.7%.

The wide input voltage range makes the inverter suitable to low power installations with reduced string size. It is available with an optional fully-integrated DC switch, fuse and remote controlled DC disconnect function. The unit is free of electrolytic capacitors, leading to a longer product lifetime.




AURORA TRIO

Features


- 'Electrolyte-free' power converter to further increase the life expectancy and long term reliability
- True three-phase bridge topology for DC/AC output converter
- Each inverter is set on specific grid codes which can be selected in the field
- Dual input sections with independent MPP tracking, allows optimal energy harvesting from two sub-arrays oriented in different directions
- Wide input range
- High speed and precise MPPT algorithm for real time power tracking and improved energy harvesting
- Flat efficiency curves ensure high efficiency at all output levels ensuring consistent and stable performance across the entire input voltage and output power range
- Outdoor enclosure for unrestricted use under any environmental conditions
- Integrated DC disconnect switch in compliance with international Standards (-S Version)
- RS-485 communication interface (for connection to laptop or datalogger)
- Compatible with PVI-RADIOMODULE for wireless communication with Aurora PVI-DESKTOP

BLOCK DIAGRAM OF PVI-10.0-TL-OUTD AND PVI-12.5-TL-OUTD

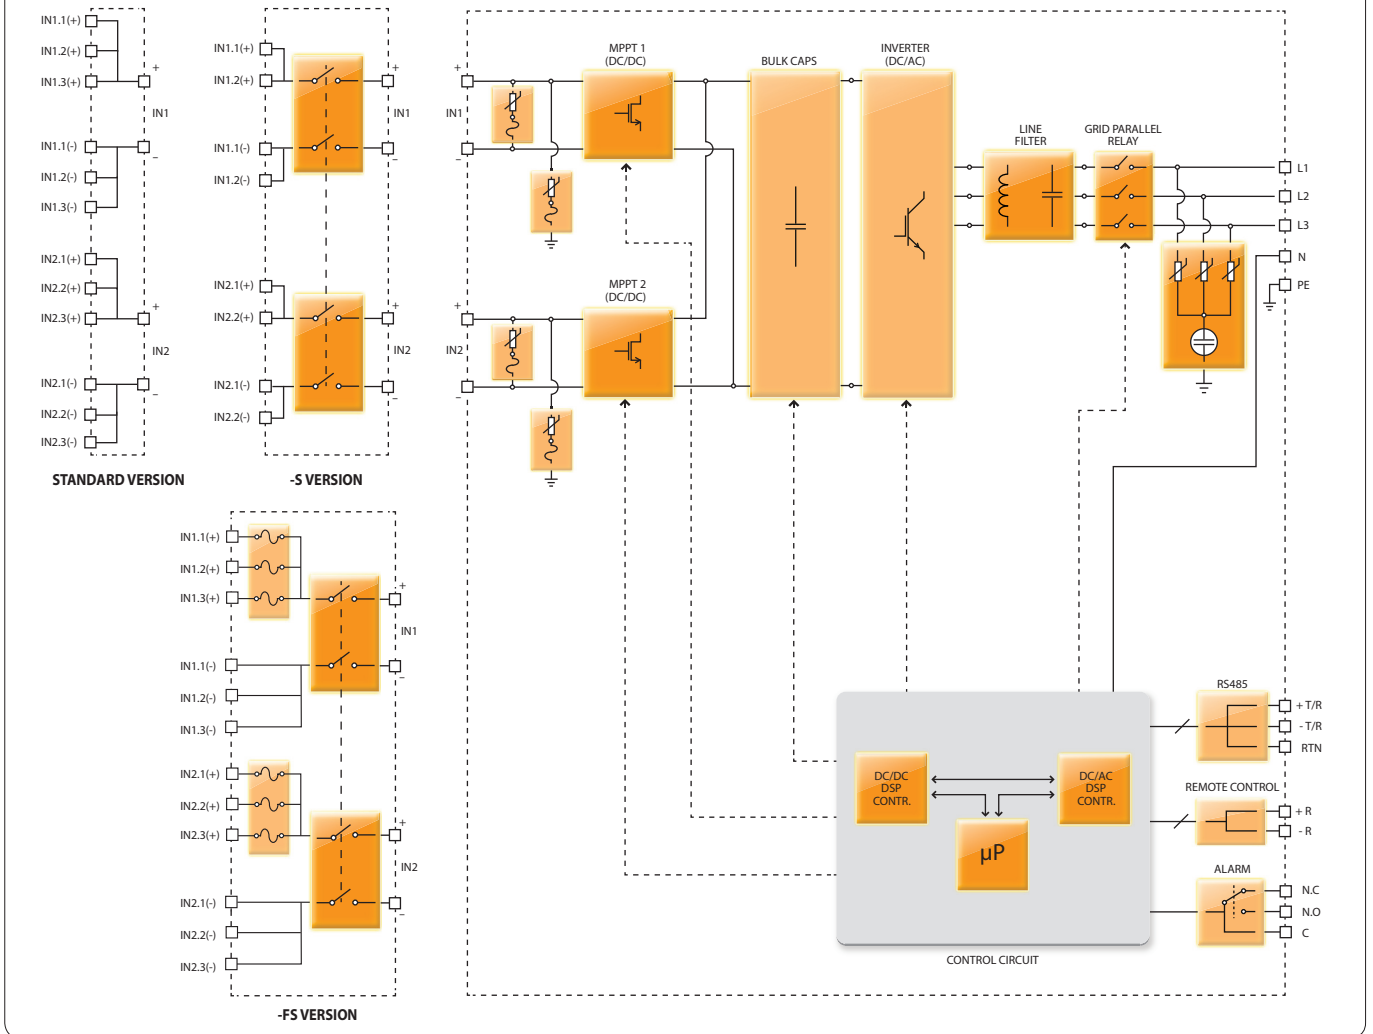


Block Diagram and Efficiency Curves

PVI-10.0-TL-OUTD

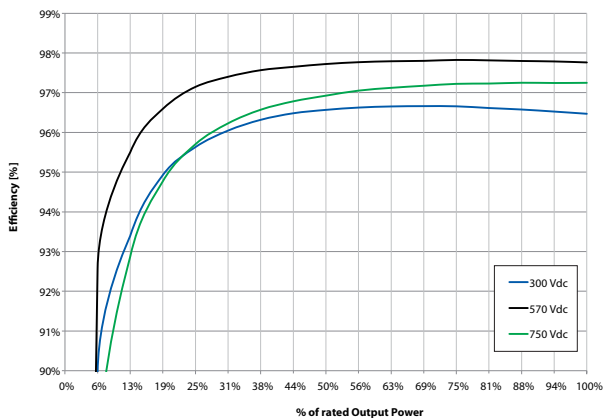

PVI-12.5-TL-OUTD

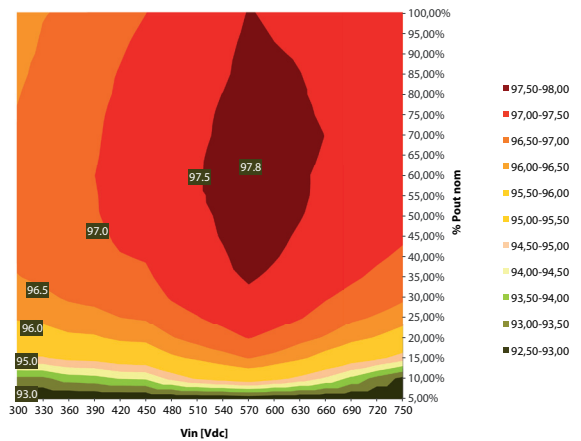

PARAMETER	PVI-10.0-TL-OUTD	PVI-12.5-TL-OUTD
Input Side		
Absolute Maximum DC Input Voltage ($V_{max,abs}$)	900 V	
Start-up DC Input Voltage (V_{start})	360 V (adj. 250...500 V)	
Operating DC Input Voltage Range ($V_{dcmin}...V_{dcmax}$)	0.7 x V_{start} ...850 V	
Rated DC Input Power (P_{dcr})	10300 W	12800 W
Number of Independent MPPT	2	
Maximum DC Input Power for each MPPT ($P_{MPPTmax}$)	6800 W	8000 W
DC Input Voltage Range with Parallel Configuration of MPPT at P_{acr}	300...750 V	
DC Power Limitation with Parallel Configuration of MPPT	Linear Derating From MAX to Null [$750V \leq V_{MPPT} \leq 850V$]	
DC Power Limitation for each MPPT with Independent Configuration of MPPT at P_{acr} , max unbalance example	6800 W [$380V \leq V_{MPPT} \leq 750V$] the other channel: $P_{dcr} - 6800W$ [$195V \leq V_{MPPT} \leq 750V$]	8000 W [$445V \leq V_{MPPT} \leq 750V$] the other channel: $P_{dcr} - 8000W$ [$270V \leq V_{MPPT} \leq 750V$]
Maximum DC Input Current (I_{dcmax}) / for each MPPT ($I_{MPPTmax}$)	36.0 A / 18.0 A	
Maximum Input Short Circuit Current for each MPPT	22.0 A	
Number of DC Inputs Pairs for each MPPT	2 (-S Version) 3 (Standard or -FS Version)	
DC Connection Type	Tool Free PV Connector WM / MC4	
Input Protection		
Reverse Polarity protection	Yes, from limited current source	
Input Over Voltage Protection for each MPPT - Varistor	2	
Photovoltaic Array Isolation Control	According to local standard	
DC Switch Rating for each MPPT (-S Version)	25 A / 1000 V	
Fuse Rating (-FS Version)	10 A / 1000 V	
Output Side		
AC Grid Connection Type	Three phase (Δ/Y)	
Rated AC Power (P_{acr})	10000 W	12500 W
Maximum AC Output Power (P_{acmax})	11000 W ⁽³⁾	13800 W
Rated AC Grid Voltage (V_{acr})	400 V	
AC Voltage Range	320...480 V	
Maximum AC Output Current ($I_{ac,max}$)	16.6 A	20.0 A
Rated Output Frequency (f_r)	50 Hz	
Output Frequency Range ($f_{min}...f_{max}$)	47...53 Hz ⁽²⁾	
Nominal Power Factor ($\cos\phi_{i,acr}$)	> 0.995 (adj. ± 0.9)	
Total Current Harmonic Distortion	< 2%	
AC Connection Type	Screw terminal block	
Output Protection		
Anti-Islanding Protection	According to local standard	
Maximum AC Overcurrent Protection	19.0 A	22.0 A
Output Overvoltage Protection - Varistor	3 plus gas arrester	
Operating Performance		
Maximum Efficiency (η_{max})	97.8%	
Weighted Efficiency (EURO/CEC)	97.1% / -	97.2% / -
Feed In Power Threshold	30.0 W	
Stand-by Consumption	< 10.0 W	
Communication		
Wired Local Monitoring	PVI-USB-RS485_232 (opt.), PVI-DESKTOP (opt.)	
Remote Monitoring	PVI-AEC-EVO (opt.), AURORA-UNIVERSAL (opt.)	
Wireless Local Monitoring	PVI-DESKTOP (opt.) with PVI-RADIOMODULE (opt.)	
User Interface	16 characters x 2 lines LCD display	
Environmental		
Ambient Temperature Range	-25...+60°C (-13...+140°F) with derating above 55°C (131°F)	-25...+60°C / -13...140°F with derating above 50°C/122°F
Relative Humidity	0...100% condensing	
Noise Emission	< 50 db(A) @ 1 m	
Maximum Operating Altitude without Derating	2000 m / 6560 ft	
Physical		
Environmental Protection Rating	IP 65	
Cooling	Natural	
Dimension (H x W x D)	716mm x 645mm x 222mm / 28.2" x 25.4" x 8.7"	
Weight	< 41.0 kg / 90.4 lb	
Mounting System	Wall bracket	
Safety		
Isolation Level	Transformerless	
Marking	CE	
Safety and EMC Standard	EN 50178, AS/NZS3100, AS/NZS 60950, EN61000-6-2, EN61000-6-3, EN61000-3-11, EN61000-3-12	
Grid Standard	DK 5940, VDE 0126-1-1, G59, EN 50438, RD1663, AS 4777, BDEW	
Available Products Variants		
Standard	PVI-10.0-TL-OUTD	PVI-12.5-TL-OUTD
With DC Switch	PVI-10.0-TL-OUTD-S	PVI-12.5-TL-OUTD-S
With DC Switch and Fuse	PVI-10.0-TL-OUTD-FS	PVI-12.5-TL-OUTD-FS

1. The AC voltage range may vary depending on specific country grid standard

2. The Frequency range may vary depending on specific country grid standard

3. Limited to 10000 W for Benelux



www.power-one.com

Power-One Renewable Energy Worldwide Sales Offices

Country	Name/Region	Telephone	Email
Australia	Asia Pacific	+61 2 9735 3111	sales.australia@power-one.com
China	Asia Pacific	+86 755 2988 5888 ext.5588	sales.china@power-one.com
Singapore	Asia Pacific	+65 6896 3363	sales.singapore@power-one.com
France	Europe	00 800 00287672 Choix n°4	sales.france@power-one.com
Germany	Europe	+49 7641 955 2020	sales.germany@power-one.com
Italy	Europe	+39 055 9195 396	sales.italy@power-one.com
Spain	Europe	+34 629253564	sales.spain@power-one.com
United Kingdom	Europe	+44 1903 823 323	sales.UK@power-one.com
Dubai	Middle East	+971 50 100 4142	sales.dubai@power-one.com
Canada	North America	+1 877 261-1374	sales.canada@power-one.com
USA East	North America	+1 877 261-1374	sales.usaeast@power-one.com
USA Central	North America	+1 877 261-1374	sales.usacentral@power-one.com
USA West	North America	+1 877 261-1374	sales.usawest@power-one.com